



CBPX2-SM

CBP-DC 15/15 SM 0.18kW/4 1050RPM 3-230/400V-50HZ IE1




Double inlet duplex centrifugal fan , forward curved brand Soler_Palau model CBP-DC 15/15 SM 0.18kW/4 1050rpm 3-230/400V-50Hz IE1 .


Theoretical Working Point

Airflow	-
Static Pressure	0,000 Pa
Temperature	20 °C
Altitude	0 m
Density	1,2 kg/m ³
Frequency	50 Hz

Performance Chart

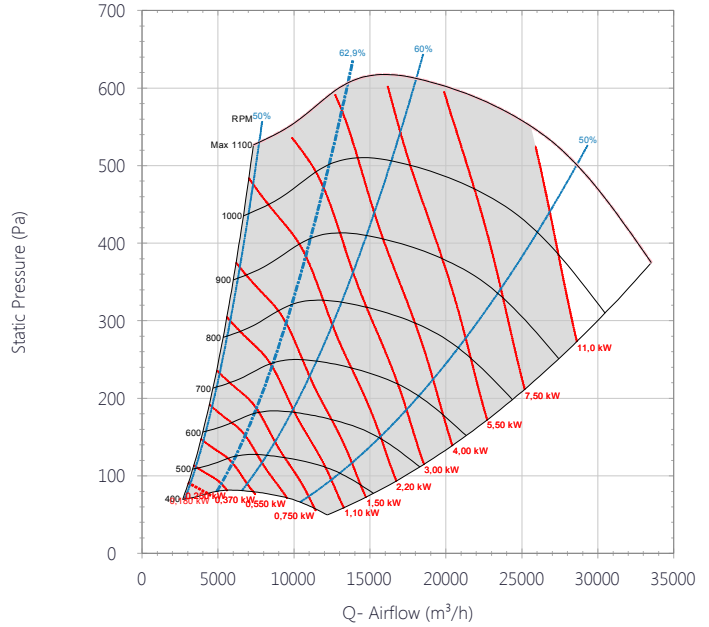

Drawing

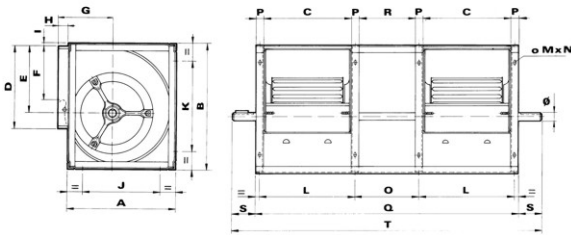


A	B	C	D	E	F	G	H	I
538	625	473	403	343	270	267	41	6
J	K	L	M	N	O	P	Q	R
444	533	503	18	11	351	30	1387	321
S	T	DE						
75	1537	25						



CBPX2-SM

CBP-DC 15/15 SM 0.18KW/4 1050RPM 3-230/400V-50HZ IE1

Performance Chart

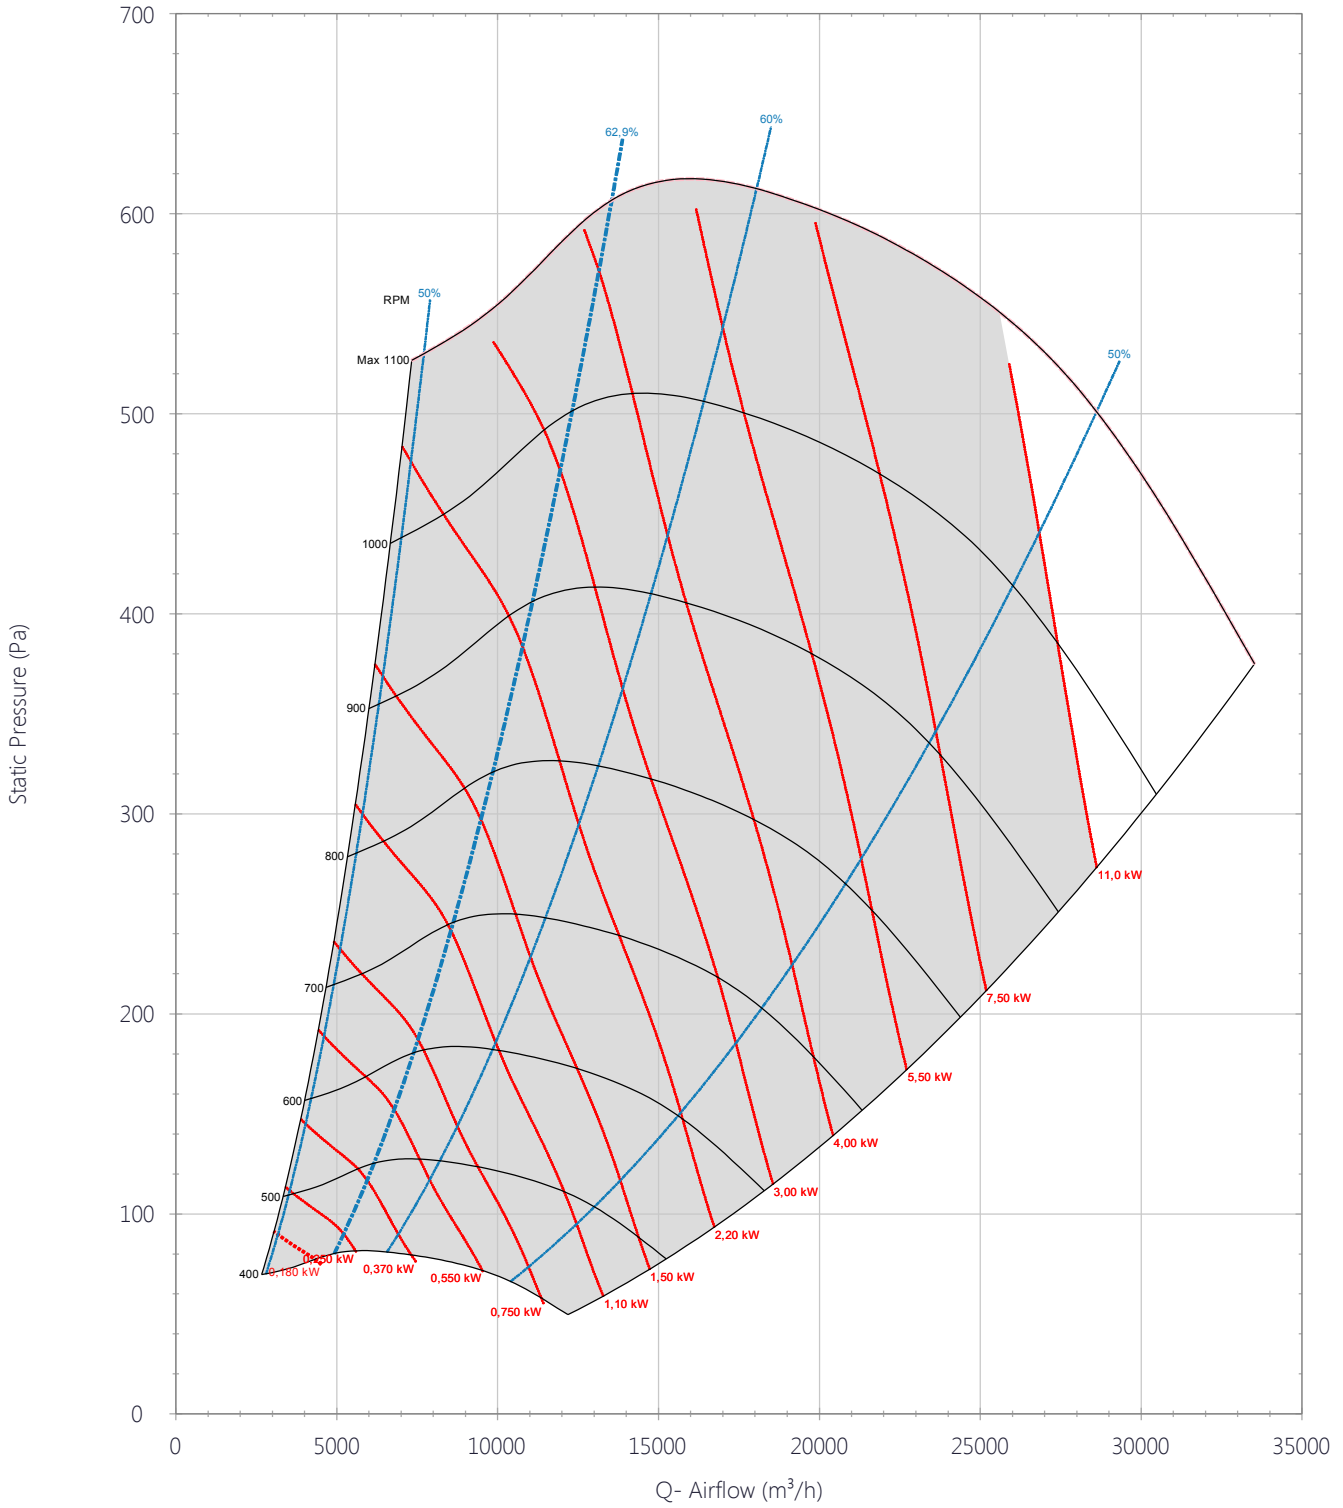




CBPX2-SM

CBP-DC 15/15 SM 0.18KW/4 1050RPM 3-230/400V-50HZ IE1

Drawing

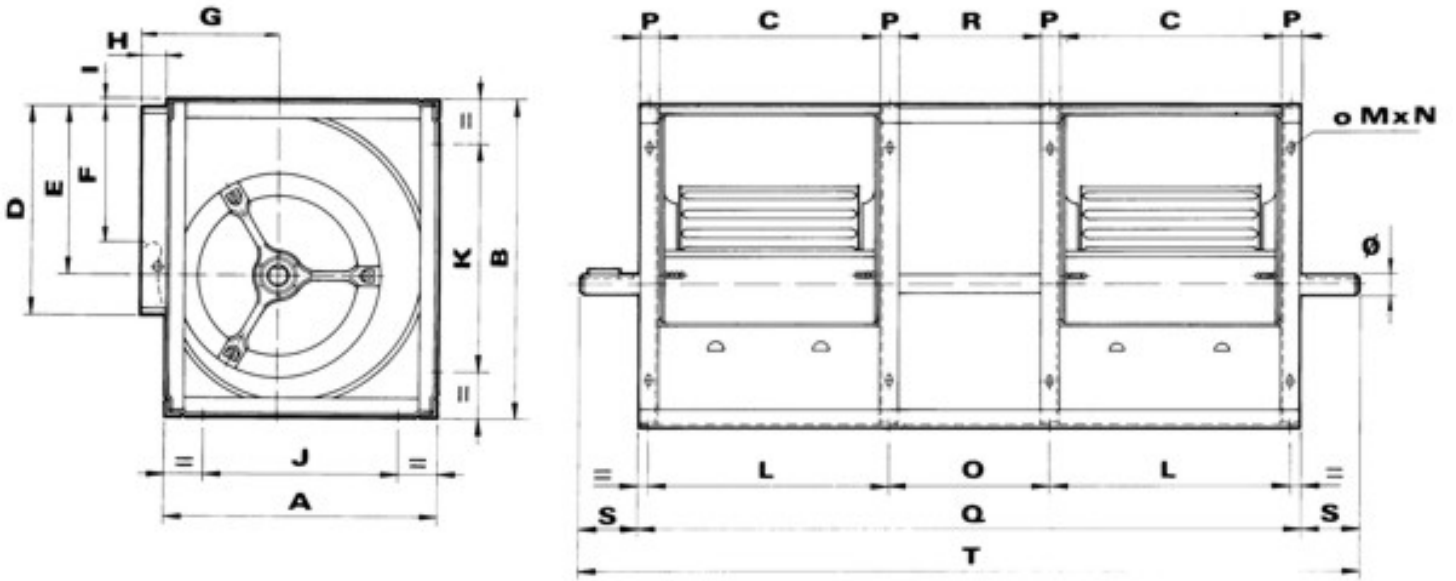

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T
538	625	473	403	343	270	267	41	6	444	533	503	18	11	351	30	1387	321	75	1537

DE

25



CBPX2-SM

CBP-DC 15/15 SM 0.18KW/4 1050RPM 3-230/400V-50HZ IE1

ErP Data

Maximum efficiency %	0,0
Installation type	D
Category efficiency	Total
N	
Variable speed drive	
Year of manufacture	Product Rating Plate
Manufacturer's Info	S&P
Product code	SP159705SCO16V0
Input power at optimum efficiency point (kW)	0,000
Airflow at optimum efficiency point [m3/h]	0,000
Pressure at optimum efficiency point [Pa]	0
Speed at optimum efficiency point	1050
Specific Ratio	1
Recycling/disposal	Instruction Manual
Maintenance	Instruction Manual
Additional components	Catalogue and according to ISO 5801