

## OFFER | project data

**An:**

Nicotra-Gebhardt Ltd  
Nicotra-Gebhardt Ltd  
Parkgate Business Park

GB - Rotherham S62 6JQ

Phone: 1709780760

Fax: 1709780762

Mail: matthew.Riggall@regalrexnord.com

**Von:**

Nicotra-Gebhardt Ltd  
Matthew Riggall  
Unit D, Parkgate Business Park Rotherham South  
Yorkshire, UK, S62 6JQ

Phone: 0044 (0)1709 780760

Fax: 0044 (0)1709 780762

Mail: matthew.Riggall@regalrexnord.com

**Projekt:**

Acc. to your enquiry

Customer's offer no.:

We have selected the following items:

**Item of quotation: 10****Specification of: DDMP 9/9 M6A1 DA5 230V-1F****High performance centrifugal fan DDMP**


Double width, double inlet (DWDI), direct drive, forward curved blades fan. Lap-jointed scroll made of galvanized steel (EN 10142), assembled through a high-technology roller-locked seaming. Straight cut off plate at fan discharge. Impeller with forward curved blades of galvanized steel plate, directly mounted on a brushless, permanent magnets, external rotor motor, without transmission losses, dynamically balanced according to DIN ISO 21940-11. The driver is a separate unit, connected to the fan motor, to power supply and to the control system with quick-connection plugs, ready for operation, without further configuration. Driver directly installed on the scroll, and factory-configured, for a plug and play solution: no further configuration is needed. Continuous speed control of the Drive System by 0 ... 10 V analogue signal, or with Modbus RS485-compliant interface. The complete drive system is in protection class IP 54. Power supply 230V – 50/60 Hz. Air performance ratings according to AMCA 210-07 (Fig. 12) and ISO 5801 (Fig. 69 c and par. 30.2 f).

## Technical data of the fan: DDMP 9/9 M6A1 DA5 230V-1F


fulfills the ErP requirements 2015

Description	Value	Dimension
<b>Specified duty point</b>		
<b>Actual duty point</b>		
Installation acc. DIN 24163 Part 1		B
Reference density ( $\rho_{ref}$ )	1.20	kg/m <sup>3</sup>
Medium temperature (t)	20	C
Fan weight	11	kg
<small>This duty point can only be reached by using an inverter/controller for motor speed control!</small>		
<b>Rated data</b>		
Phases-Voltage-Frequency	1~230-50/60	V-Hz
Rated motor current ( $I_N$ )	N/A	A
<b>operational limits</b>		
Max. absorbed power ( $P_{1max}$ )	1.04	kW
Temperature range of conveying medium ( $t_{min} \dots t_{max}$ )	-20...40	C
<b>ErP-Data at best efficiency and density - kg/m<sup>3</sup></b>		
measurement- / efficiency category	B / total	
design status of VSD	VSD is integrated	
overall efficiency ( $\eta_{opt}$ )	55.9	%
achieved efficiency grade ( $N_{ist}$ )	62.4	
required efficiency grade in 2013 / 2015 (N)	42 / 49	
Air flow rate ( $V_{opt}$ )	2803	m <sup>3</sup> /h
pressure rise ( $dp_{opt}$ )	625	Pa
Fan speed ( $n_{vopt}$ )	1632	min <sup>-1</sup>
motor power input ( $P_{1opt}$ )	0.871	kW
specific ratio ( $d_{dpopt}$ )	1.006	

## Fan curve to DDMP 9/9 M6A1 DA5 230V-1F

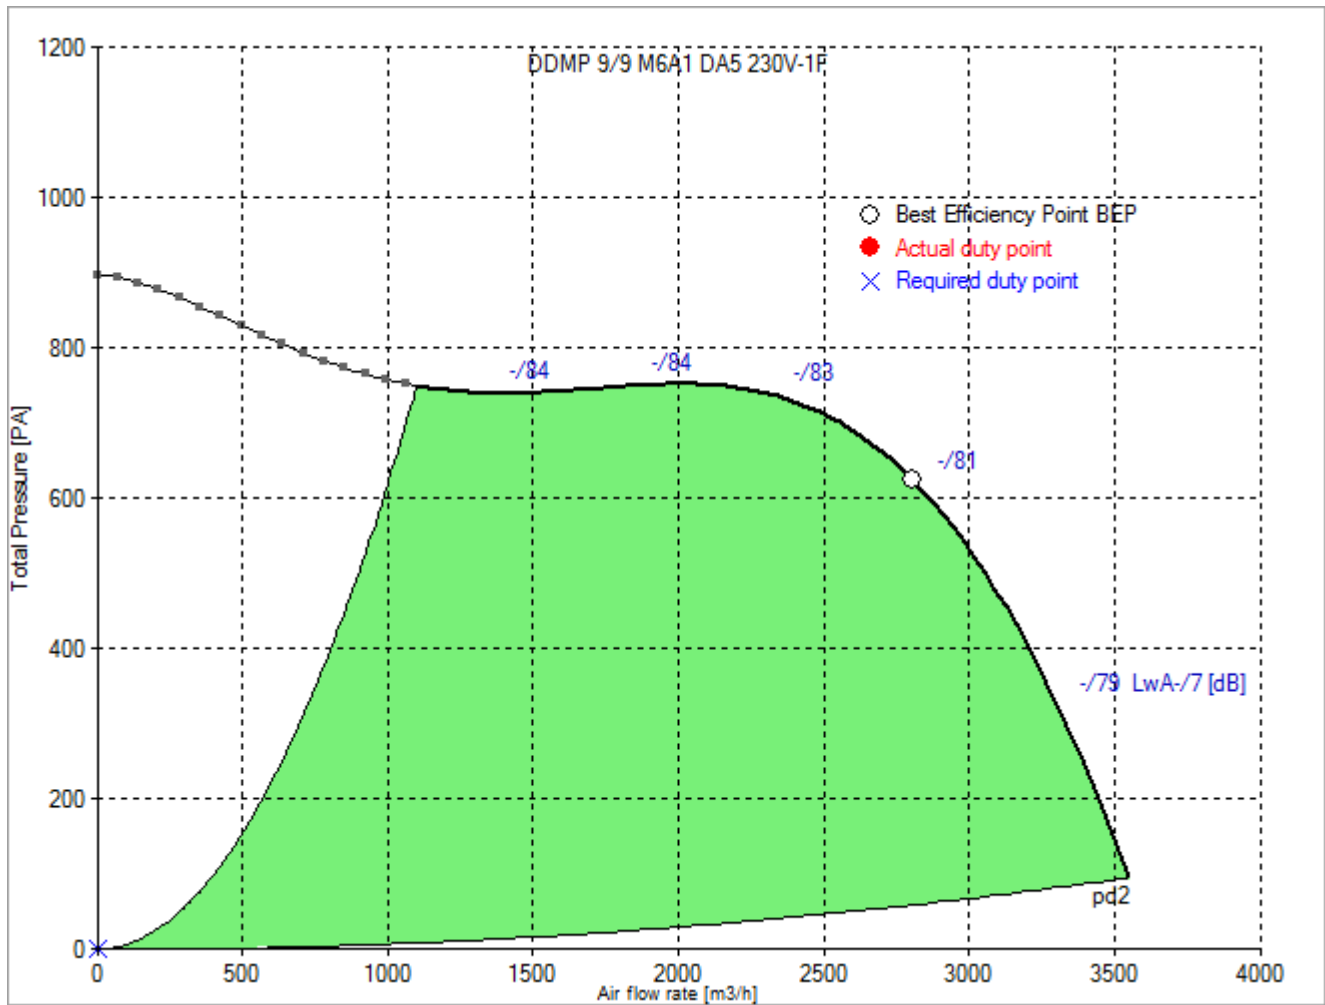


## Dimensions to DDMP 9/9 M6A1 DA5 230V-1F

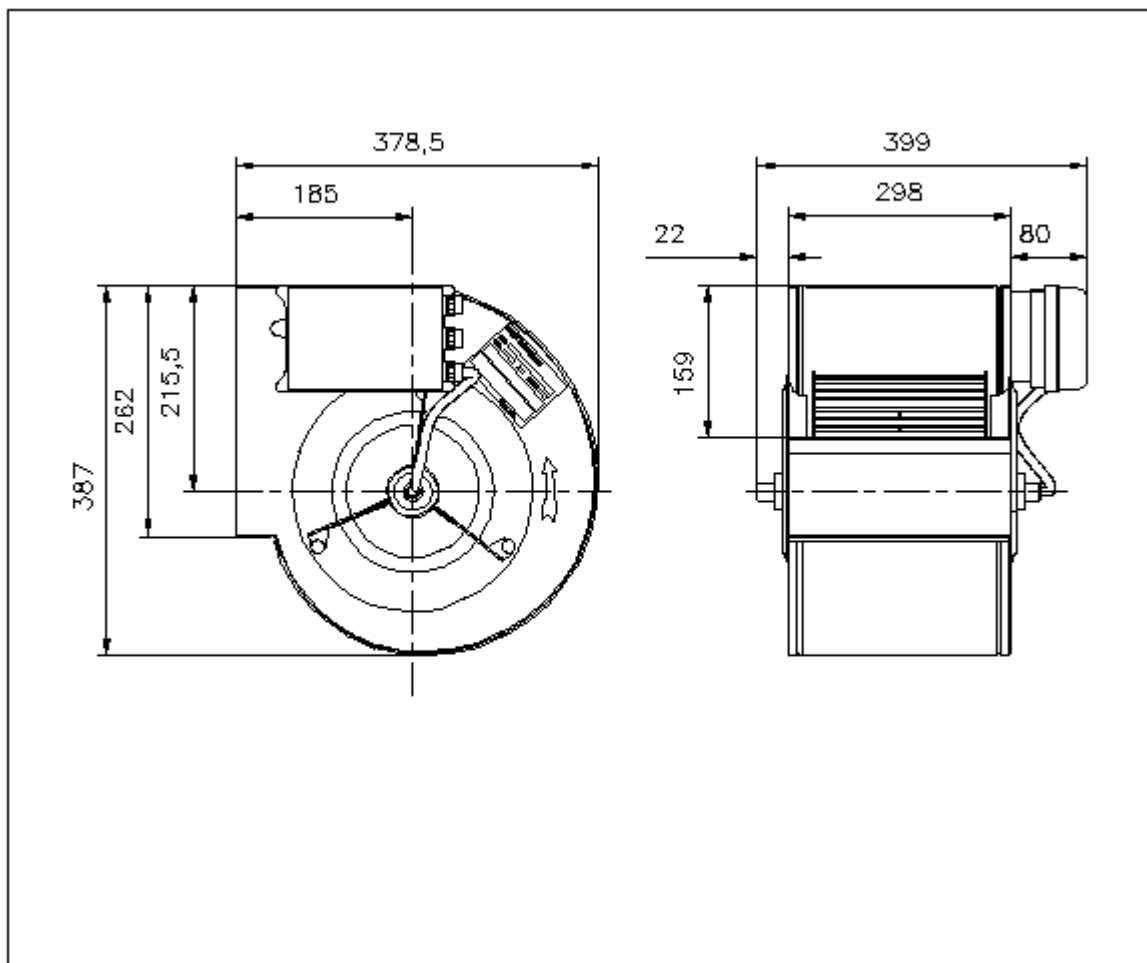

Rotation:  
Handing:

RD  
90

## Wiring diagram of the fan DDMP 9/9 M6A1 DA5 230V-1F

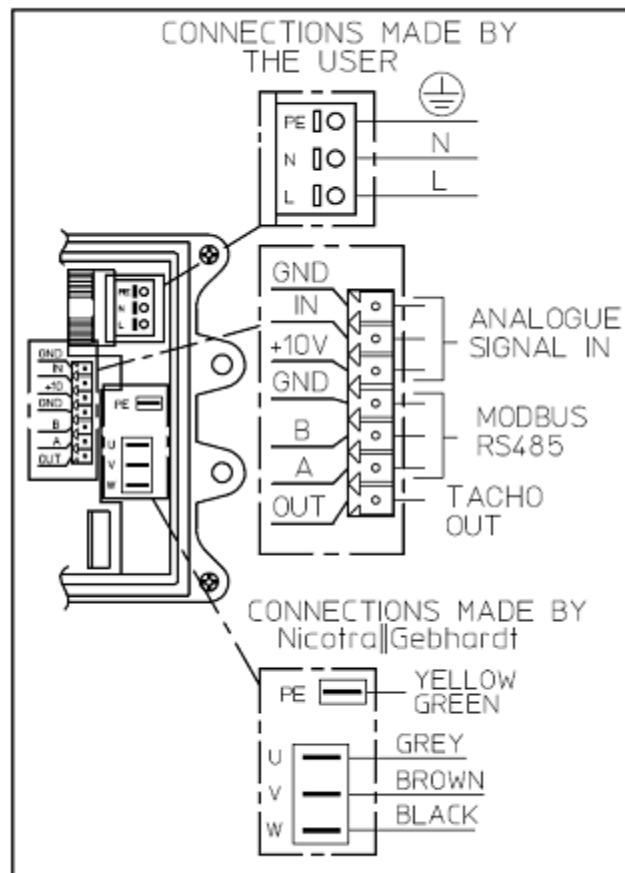

DDMP 1KW

28-11-2017 7W

Wiring diagram for connection to: [mains - VSD - motor](#)  
 Rotation: [LG](#)